

9920 GETTYSBURG SERIES

SPECIFICATIONS

GENERAL

The 9920 Gettysburg series is a classically detailed six-sided medium scale fixture. It consists of a decorative cast cage, cast ballast assembly, acrylic lenses and a dramatic hinged roof design. The roof shall be appointed with a decorative cast finial.

POST FITTER

The fitter or base shall be heavy wall cast aluminum, 356 alloy for high tensile strength. It shall have an inside diameter opening to fit a 3" diameter pole or tenon. When ordered with a Sternberg aluminum pole, the fitter shall be set screwed to the pole top or tenon.

BALLAST HOUSING

The ballast housing shall be heavy wall cast aluminum, 356 alloy for high tensile strength and to ensure high capacity heat sinking of ballast temperatures, keeping the ballast cooler and ensuring long life. The ballast mounting plate shall be cast aluminum and provide tool-less removal from the housing using 2 ea finger latches for easy access.

ELECTRICAL

Fixture shall be U.L. or E.T.L. listed in U.S. and Canada. H.I.D. ballasts shall be high power factor with lamp starting down to -30 degrees C. Medium base and mogul base porcelain sockets are 4KV rated. The ballast/socket assembly shall be pre-wired when ballast is located in the fixture. All compact fluorescent (PL) ballasts shall be instant start electronic with a starting temperature of down to 0 degrees F. They shall have a 4-pin socket to accept quad or triple tube lamps. Ballasts shall be DOE EISA compliant.

FIXTURE HOUSING

The 9920 fixture shall be 15" wide and the overall height shall be 36". It shall be made of heavy wall cast aluminum, 356 alloy and lenses shall be made of vandal resistant acrylic, available in clear (CA), clear seeded (CSA), clear textured (CTA), prismatic (PA) and white (WA) acrylic. The fixture cage shall cast in one piece.

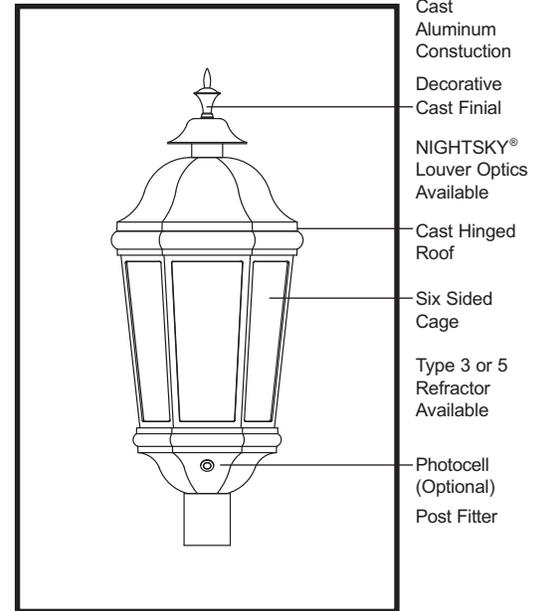
OPTICAL OPTIONS

Refractors shall be 6" diameter borosilicate glass with an I.E.S. Type 3 (RE3) or Type 5 (RE5) distribution. It shall be secured to the socket stem with 3/8" plated steel threaded pipe nipple and rest on a cast aluminum holder with anti-shock gasket. The refractor will be secured to cast holder with a quarter-turn internal aluminum twist ring for ease of maintenance.

The NIGHTSKY® OPTI-SHIELD® Louver Optic System (LO) shall be a multi-tier reflector with 7" diameter rings to produce an I.E.S. Cut-off Type 3 or 5 distribution. The Louver Optic System shall be made of highly specular anodized aluminum and shall come standard with medium base socket. **House Side Shields** (HSS) will block 120° of light in any one direction.

Frosted Glass Hurricane Chimney (FHC) is an optic option which adds an authentic touch.

House Side Shield (HSS) is an option which will block up to 120° of light in any one direction.

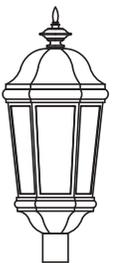



EPA = 0.99 (ft²)
WEIGHT = 28 LBS






9920 GETTYSBURG

FIXTURES / ARMS PM-WB

FIXTURES/OPTICAL SYSTEMS

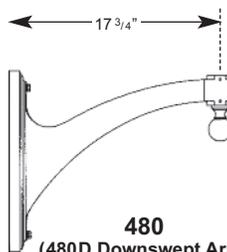
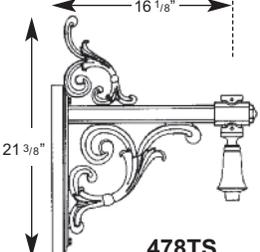
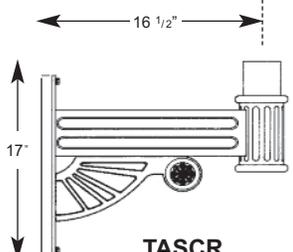
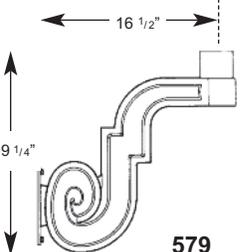
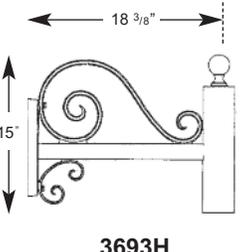

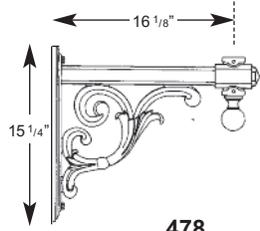
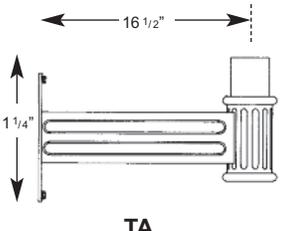


15" W	15" W	15" W	15" W	Alzak Disc			
							
36"	34 1/2"	36"	28"		120°		
9920	9920B Ball Finial	9920TF Tall Finial	9920H Hanging Version	RE3 RE5 Refractor	HSS House Side Shield	FHC Frosted Hurricane Chimney	LO3 LO5 Louver Optics

LENSES

	CSA Clear Seeded Acrylic		CA Clear Acrylic		CTA Clear Textured Acrylic		PA Prismatic Acrylic		WA White Acrylic
---	--	---	-------------------------------	---	--	--	-----------------------------------	---	-------------------------------

ARMS - POST MOUNT (PM) or WALL BRACKETS (WB)

See Arms Section for more information

 480 (480D Downswept Arm) 17 3/4" (width) 16 1/2" (height)	 478TS 16 1/8" (width) 21 3/8" (height)	 TASCR 16 1/2" (width) 17" (height)	 579 16 1/2" (width) 19 1/4" (height)	 3693H 18 3/8" (width) 15" (height)
 6236 18 3/4" (width) 15" (height)	 478 16 1/8" (width) 15 1/4" (height)	 TA 16 1/2" (width) 11 1/4" (height)	 55L 15 5/8" (width) 12 1/4" (height)	 PIER BASE MOUNT 450PB 10 1/2" (width) 3 3/4" (height)

HANGING TYPES

 CH44 Chain Hung 11-13 (height)	SPECIFY OVERALL DROP IN INCHES	 SH44 Stem Hung
---	--	--

BUILDING A PART NUMBER

POST & ARM FIXTURES

ARM MOUNTED FIXTURE	CENTER POST TOP FIXTURE (PT)	POST	POST CAP	LIGHT SOURCE BALLAST	OPTICS	OPTIONS	LENS	FINISH
NO. OF ARMS	FIXTURE / POSTARM	FIXTURE	(See Post Section)	WATTS / TYPE / VOLTS				
1	9920H/3693H		3914FP4	FCC	100 HPS120	RE3	PEC1	CA / BK

WALL FIXTURES

FIXTURE / WALLBRACKET	LIGHT SOURCE BALLAST WATTS / TYPE / VOLTS	OPTICS	OPTIONS	LENS	FINISH
9920TF/480WB	100 HPS120	RE5	PEC1		BK



PIER FIXTURES
Uses same information boxes as wall fixture

9920TF/450PB

FIXTURE / FITTER / PIER BASE

PART NUMBER SELECTIONS

FIXTURES

- 9920TF
- 9920B
- 9920

OPTICS

- RE3
- RE5
- ALZAK
- HSS
- LO3
- LO5
- FHC²

HANGING TYPE

- CH44
- SH44

POST ARMS

- 478PM
- 478TSPM
- 480PM
- 480DPM
- 55LPM
- 6236PM
- 579PT
- TAPT
- TASCRIPT
- 3693HPM

VOLTAGES

- 120
- 208
- 240
- 277
- 480
- MULTI (120-277)

WALL BRACKET ARMS

- 478WB
- 478TSWB
- 480WB
- 480DWB
- 55LWB
- 6236WB
- 579WB
- TAWB
- TASCRTWB
- 3693HWB

PIER MOUNT

- 450PB

BALLASTS³

- 35HPS¹
- 50HPS
- 70HPS
- 100HPS
- 150HPS
- 50MHP
- 70MHP
- 100MHP
- 150MHP
- 175MHP⁵
- 26PLT
- 32PLT
- 42PLT
- 57PLT
- 70PLT
- INCAND

LAMPS⁴

- HPS35/MED
- HPS50/MED
- HPS70/MED
- HPS100/MED
- HPS150/MED
- MHP50/MED
- MHP70/MED
- MHP100/MED
- MHP150/MED
- MHP175/MOG/ED28⁵
- PLT26
- PLT32
- PLT42
- PLT57
- PLT70

LENSES

- CSA
- CA
- CTA
- PA

STANDARD FINISHES*

- BKT Black Textured
- WHT White Textured
- PGT Park Green Textured
- ABZT Architectural Medium Bronze Textured
- DBT Dark Bronze Textured

*Smooth Finishes are available upon request

CUSTOM FINISHES

- OI Old Iron
- RT Rust
- WBR Weathered Brown
- CD Cedar
- WBK Weathered Black
- TT Two Tone

STERNBERG SELECT FINISHES

- VG Verde Green
- SI Swedish Iron
- OWGT Old World Gray Textured

NOTES:

¹ 35HPS is 120 volt only.

² MED base only when used to house lamp.

³ Medium base sockets standard with ballasts up to 150 watts HID.

Mogul base sockets are standard with ballasts 200 watts and over. 4-pin for PL.

⁴ Metal halide systems are pulse start.

⁵ Consult factory for limitations.

9920 GETTYSBURG SERIES

SPECIFICATIONS

**LIST NO. 9920
GETTYSBURG
SERIES****QUARTZ RE-STRIKE**

The 9920 fixture can be supplied with an optional quartz re-strike system to retain constant fixture light if the H.I.D. lamp fails. The fixture will be equipped with a 100 watt quartz lamp and a controller to run on a 120 volt circuit and must be used in conjunction with a 120 volt or multi-tap ballast.

PHOTOCELLS

Photocells shall be either the thermo bi-metal button type or the electronic button type. On single post top fixtures the photocell shall be mounted in the fitter and pre-wired to ballast. On multiple head fixture assemblies photocells shall be mounted in the pole shaft on an access plate and are not pre-wired as ballast housing assemblies and fitters are packaged separately for ease of wiring to source. The thermo bi-metal photocell shall be designed to turn on at 1.0 footcandle and turn off at not more than 5 footcandles. The electronic button type photocell is instant on and a 5-10 second turn off and shall turn on at 1.5 footcandles with a turn-off at 2-3 footcandles. Photocells are either 120 volt or 208 thru 277 volt.

ARMS

All arms are made of cast aluminum and/or extruded aluminum. Arms with decorative filigree have meticulously detailed scroll work and gracefully curved brackets. All 9920 fixtures will have its fitter either welded to the arm or will be mechanically attached at the factory to ensure arms will be plumb, secure and level over the life of the installation. Each arm shall be bolted to a post mount adapter, which is welded to the pole to ensure proper alignment to the base. Twin TA, TASCRA and 579 arms will be attached to a decorative center hub which will slip-fit the center tenon of the pole (not shown). BA and 779 arms are available as a twin application. Arms are pre-wired for ease of installation.

FINISH

Prior to coating, each assembly shall be chemically cleaned and etched in a 5-stage washing system which includes alkaline cleaning, rinsing, phosphoric etching, reverse osmosis water rinsing and non-chrome sealing to ensure corrosion resistance and excellent adhesion for the finish coating. The finish coating shall be electrostatically applied semi-gloss, super durable polyester powder baked at 400 degrees for a durable and superior, color retentive finish. Our optional antique Verde Green finish and Swedish Iron finish are hand brushed using a 3-step process. The total assembly shall be wrapped in shockproof wrapping or fully enclosed in corrugated cartons.

WARRANTY

Five-year limited warranty. See product and finish warranty guide for details.

