



V410-XRLED VENICE SERIES

LED

EPA
2.15 (ft²)
WEIGHT
40 LBS

5 YEAR
WARRANTY

LUMEN
RANGE
1,390 to
5,645

LIFE SPAN
L70
MINIMUM
50,000
HOURS

UL
LISTED

CLICK
FOR FAQ's

JOB NAME _____

FIXTURE TYPE _____

MEMO _____

BUILD A PART NUMBER

ORDERING EXAMPLE: **2A-V410-XRLED-9L45T5-MDL07-CA-FHD-HSS/478PM/3810FP4/FCC/BKT**

Mounting Config.	Fixture	LED	CCT	Type	Driver	Lens	Option Control	Option Fuse	Option Chimney	Option House Side Shield	Arm <small>See Arm Spec Sheets</small>	Pole <small>See Pole Spec Sheets</small>	Finish

Mounting Configuration

(Click here to view mounting configuration sheet)

- 1W • 2A • 3A90 • 1AM • 28PB¹
- PT • 2A90 • 3APT • 2AM
- 1A • 2APT • 4A • CH28¹
- 1APT • 3A • 4APT • SH28¹

W = Wall Mount PT = Post Top A = Arm Mount AM = Arm Mid-Mount PB = Pier Base SH = Stem Hung CH = Chain Hung

¹Include Stem/Chain length in inches after designation (IE: CH44-36").

Fixture

- V410

LED

- XRLED-9L • XRLED-12L

CCT - Color Temperature (K)

- 45(00) • 35(00) • 27(00)

Type

- T2 • T3 • T4 • T5

Driver

- MDL07 (120v-277v, 700Ma)²
- MDL14 (120v-277v, 1400Ma)
- MDH07 (347v-480v, 700Ma)²
- MDH14 (347v-480v, 1400Ma)

²For use with 9L system only.

Lens

- A (Acrylic)
- WA (White Acrylic)
- CSA (Clear Seeded Acrylic)

Options (Click here to view accessories sheet)

- PEC Electronic Button Photocontrol (120v-277v)
- PEC4 Electronic Button Photocontrol (480v)
- FHD³ Double Fuse and Holder
- FMC Frosted Mission Chimney
- HSS House Side Shield

³Ships loose for installation in base.

Arm (Click here to view arm website page)

See Arms & Wall Brackets specification sheets.

- 480 • TASCRC • 6236 • TA
- 478TS • 579 • 478 • 55L

Pole (Click here to view pole website page)

See Pole specification sheets.

Finish (Click here to view paint finish sheet)

Standard Finishes⁴

- BKT Black Textured
- WHT White Textured
- PGT Park Green Textured
- ABZT Architectural Medium Bronze Textured
- DBT Dark Bronze Textured

⁴Smooth finishes are available upon request.

Custom Finishes⁵

- CM Custom Match
- OI Old Iron
- RT Rust
- WBR Weathered Brown
- CD Cedar
- WBK Weathered Black
- TT Two Tone

⁵Custom colors require upcharge.

Sternberg Select Finishes

- VG Verde Green
- SI Swedish Iron
- OWGT Old World Gray Textured

Specifications

Fixture

The fixture shall be 19-1/2" diameter and 41" tall. It shall be made of heavy wall cast aluminum. The V410 is the large scale fixture in the Venice series. The luminaire shall be UL tested in US and Canada.

LEDs

The luminaire shall use high output, high brightness LED's. They shall be mounted in arrays, on printed circuit boards designed to maximize heat transfer to the heat sink surface. The arrays shall be downward facing to minimize up-light. The LED's and printed circuit boards shall be 100% recyclable; they shall also be protected from moisture and corrosion by a conformal coating of 1 to 3 mils. They shall not contain lead, mercury or any other hazard-

ous substances and shall be RoHS compliant. The LED life rating data shall be determined in accordance with IESNA LM-80. The High Performance white LED's will have a life expectancy of approximately 50,000 hours with not less than 70% of original brightness (lumen maintenance), rated at 25°C. The High Brightness, High Output LED's shall be 4500K (3500K or 2700K option) color temperature with a minimum CRI of 70. Consult factory for custom color CCT. The luminaire shall have a minimum _____ (see table) delivered initial lumen rating when operated at steady state with an average ambient temperature of 25°C (77°F).

Optics

The luminaire shall be provided with individual, refractor type optics applied to each LED. The luminaire shall provide Type ____ (2, 3, 4 or 5) light distribution per the IESNA classifications. Testing shall be done in accordance with IESNA LM-79.

Electronic Driver

The LED driver shall be U.L. Recognized. It shall be remotely mounted in the field, arm, pole or base depending on the selected options. It shall be supplied with a quick-disconnect electrical connector on the power supply, providing easy power connections and fixture installation. It shall have overload as well as short circuit protection, and have a DC voltage output, constant current design, 50/60HZ. It shall be supplied with line-ground, line-neutral and neutral-ground electrical surge protection in accordance with IEEE/ANSI C62.41.2 guidelines. It shall be dimmable using a 0-10V signal.

For sources over 50w: The driver shall have a minimum efficiency of 90%. The driver shall be rated at full load with THD<20% and a power factor of greater than 0.90. The driver shall contain over-heat protection

For sources under 50w: The driver shall have a minimum efficiency of 88%.

See next page

V410-XRLED VENICE SERIES

LED

Photocontrols

Button Style: The photocontrol shall be mounted in the pole shaft on an access plate. The electronic button type photocontrol is instant on with a 5-10 second turn off, and shall turn on at 1.5 footcandles with a turn-off at 2-3 footcandles. Photocontrol is 120-277 volt and warranted for 6 years.


Warranty

Five-year limited warranty. See product and finish warranty guide for details.

Finish

Refer to website for details.

Fixtures

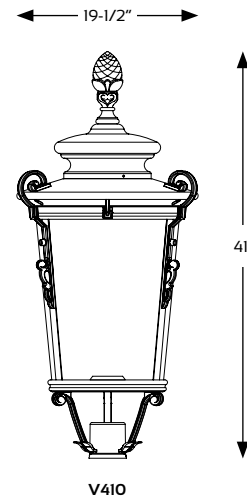

Performance

LIGHT SOURCE	T2 DELIVERED LUMENS	EFFICACY (LPW)	T3 DELIVERED LUMENS	EFFICACY (LPW)	T4 DELIVERED LUMENS	EFFICACY (LPW)	T5 DELIVERED LUMENS	EFFICACY (LPW)	WATTAGE
12L27T_-MDL14	4180	69.7	4060	67.7	4100	68.3	4460	74.3	60
12L35T_-MDL14	4925	82.1	4780	79.7	4830	80.4	5250	87.5	60
12L45T_-MDL14	5295	88.2	5140	85.7	5190	86.5	5645	94.1	60
09L27T_-MDL14	2915	63.3	2890	62.8	2580	56.1	3055	66.4	48
09L35T_-MDL14	3430	74.5	3400	73.9	3035	66.0	3595	78.2	48
09L45T_-MDL14	3690	80.2	3655	79.5	3265	71.0	3870	84.1	48
09L27T_-MDL07	1615	73.4	1585	72.1	1390	63.2	1660	75.5	22
09L35T_-MDL07	1900	86.4	1865	84.9	1640	74.4	1955	88.9	22
09L45T_-MDL07	2045	93.0	2010	91.3	1760	80.0	2100	95.5	22