

ASPIRE[®] AP650


LED
AREA /
ROADWAY
LUMINAIRE

IP 66

FAST FACTS

- BUG rating of U-0
- IP66 rated optic module
- Distribution IES types 2, 3, 4 and 5
- Wireless control - ready
- LED color temperature range of 3500K, 4500K, or 5000K
- Delivered lumens range of 4,115 to 11,735
- Lumen depreciation $L_{70} > 150,000$ hours *
- RoHS compliant
- 7 year warranty
- EPA: 1.13 square feet
- Weight : 34 lbs
- ANSI C136.31-2001 3G vibration rated

* Projected per TM-21 guideline and based on 2100mA drive current

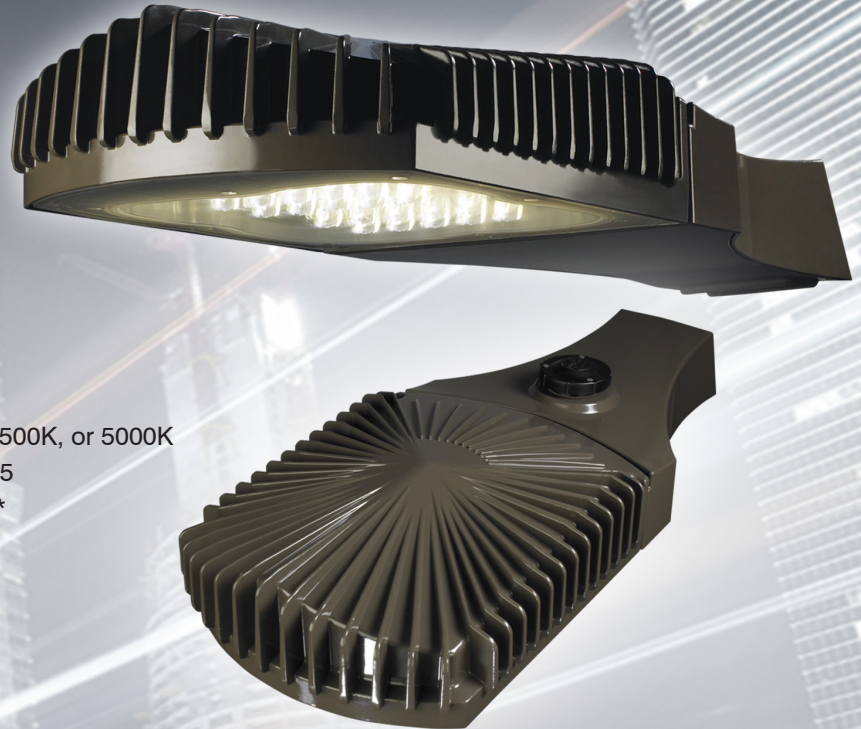

THE ASPIRE[®] AREA / ROADWAY LUMINAIRE

The Aspire[®] is a versatile luminaire suitable for area, roadway, site, and general lighting applications. Providing excellent vertical light distribution, high uniformity, and lasting performance, the Aspire[®] is ideal for commercial, institutional and municipal markets.

FEATURES/BENEFITS

- Die cast aluminum body
- Powder coat finish in 3 standard colors: gray, architectural medium bronze and black
- Leveling of ± 5 degrees in 6 steps
- Secure 4 bolt tenon clamp
- Low profile
- Tool-less access to driver
- Pole mount and wall mount options available
- Wide range of lumen output
- Dimmable driver (0-10 volts)
- Surge protection
- House Side Shield (HSS) option



SternbergLighting

ESTABLISHED 1923 / EMPLOYEE OWNED

ALWAYS INNOVATING
ALWAYS IMPROVING