



# 1521LED OMEGA SERIES

LED

EPA  
.72 (ft<sup>2</sup>)  
WEIGHT  
27 LBS

7 YEAR  
WARRANTY

LUMEN  
RANGE  
2,640 to  
10,090

LIFE SPAN  
L70  
MINIMUM  
100,000  
HOURS

UL  
LISTED

CLICK  
FOR FAQ'S

RATED  
IP65

JOB NAME \_\_\_\_\_

FIXTURE TYPE \_\_\_\_\_

MEMO \_\_\_\_\_

## BUILD A PART NUMBER

ORDERING EXAMPLE: **2A-1521LED-R-12L40T3-MDLO18-SV2-HSHB/CA4/4212P4/RCC/BKT**

Mounting Config.	Fixture	Shade Edge	LED	CCT	Distribution Type	Driver	Lens	Optional Control Receptacle	Optional Control	Option Fuse	Option Hang-straight	Option Term. Block	Option House Side Shield	Arm See Arm Spec Sheets	Pole See Pole Spec Sheets	Finish

### Mounting Configuration

(Click here to link to mounting configuration specification page)

- 1W      • 2A90      • 4A      • SH44<sup>1</sup>
- 1A      • 3A          • 1AM     • CH44<sup>1</sup>
- 2A      • 3A90      • 2AM     • CAT

W = Wall Mount   A = Arm Mount   AM = Arm Mid-Mount  
SH = Stem Hung   CH = Chain Hung   CAT = Catenary

<sup>1</sup>Include overall drop length in inches after designation for Stem/Chain application (IE: CH44-48")

### Fixture

- 1521LED      • 1521LEDSM

### Shade Edge

- R (Round Edge)      • F (Flared Edge)

### LED

- 24L      • 16L      • 12L

### CCT - Color Temperature (K)

- 27(00)    • 30(00)    • 40(00)    • 50(00)

### Distribution Type

- T2      • T3      • T4      • T5

### Driver

- MDLO18<sup>2</sup> (120V-277V, 180mA)
- MDHO18<sup>2</sup> (347V-480V, 180mA)
- MDLO14<sup>3</sup> (120V-277V, 140mA)
- MDHO14<sup>3</sup> (347V-480V, 140mA)
- MDLO08<sup>4</sup> (120V-277V, 80mA)
- MDHO08<sup>4</sup> (347V-480V, 80mA)

<sup>2</sup>16L or 12L system only

<sup>3</sup>24L or 12L system only

<sup>4</sup>12L system only

### Lens

- FG (Flat Glass)
- SG (Sag Glass)
- FSG (Frosted Sag Glass)
- SV1 (Flat Soft Vue Light Diffused Acrylic)
- SV2 (Flat Soft Vue Moderate Diffused Acrylic)
- SV4 (Flat Soft Vue Maximum Diffused Acrylic)

### Options (Click here to view accessories sheet)

- R7<sup>5</sup> 7-Pin control receptacle only
- PE<sup>5,6</sup> Twist-Lock Photocontrol (120V-277V)
- PE3<sup>6</sup> Twist-Lock Photocontrol (347V)

- PE4<sup>5,6</sup> Twist-Lock Photocontrol (480V)
- SC<sup>5,6</sup> Shorting Cap
- PEC Electronic Button Photocontrol (120v-277v)
- PEC4 Electronic Button Photocontrol (480V)
- FHD<sup>7</sup> Double Fuse and Holder
- HSHS<sup>8</sup> Standard Horizontal Hangstraight, Spike Finial
- HSHN<sup>8</sup> Standard Horizontal Hangstraight, No Finial
- HSHB<sup>8</sup> Standard Horizontal Hangstraight, Ball Finial
- EZ<sup>8</sup> Vertical Hangstraight, Large, "EZ" Mount
- TB Terminal Block
- HSS 120° House Side Shield
- BLOC Back Light Optical Control

<sup>5</sup> Only available with HSH\_ & SM.

<sup>6</sup> Requires R7 control receptacle.

<sup>7</sup> Ships loose for installation in base.

<sup>8</sup> Not for use with 1521LEDSM.

### Arm (Click here to link to arm specification page)

See Arms & Wall Brackets specification sheets.

- CA      • CSA      • FFA      • CAS
- DAG    • R2<sup>9</sup>      • RA

<sup>9</sup> Luminaires above grade height to be 2" higher than pole height, REQUIRES "EZ" hangstraight.

### Pole (Click here to link to pole specification page)

See Pole specification sheets.

### Finish

Standard Urban Finishes (Click here to view paint finish sheet)

- UGMT Gun Metal Textured
- UGM Gun Metal Matte
- UBT Urban Bronze Textured
- UB Urban Bronze Matte
- ULBT Urban Light Bronze Textured
- ULB Urban Light Bronze Matte
- USLT Urban Silver Textured
- USL Urban Silver Matte
- UWHT Urban White Textured
- UWH Urban White Matte
- UCHS Urban Champagne Satin Smooth
- BKT Black Textured

### Custom Urban Finishes<sup>10</sup>

- CM Custom Match

<sup>10</sup> Smooth finishes are available upon request.

## Specifications

### Fixture

The 1521LED Omega series is small scale, decorative downlight fixture with a spun aluminum bell styled dome. The dome is available with two types of shades: round edge (R) and flared edge (F) styles. The luminaire measures 21" outside diameter and 17" overall height. The luminaire is U.L. listed in U.S. and Canada.

### LEDs

The luminaire shall use high output, high brightness LED's. They shall be mounted in arrays, on printed circuit boards designed to maximize heat transfer to the heat sink surface. The arrays shall be roof mounted to minimize up-light. The LED's and printed circuit boards shall be 100% recyclable; they shall also be protected from moisture and corrosion by a conformal coating. They shall not contain lead, mercury or any other hazardous substances and shall be RoHS compliant. The LED life rating data shall be determined in accordance with IESNA LM-80. The High Performance white LED's will have a life expectancy of approximately 100,000 hours with not less than 70% of original brightness (lumen maintenance), rated at 25°C. The High Brightness, High Output LED's shall be 4000K (2700K, 3000K or 5000K option) color temperature with a minimum CCT. The luminaire shall have a minimum \_\_\_\_\_ (see table) delivered initial lumen rating when operated at steady state with an average ambient temperature of 25°C (77°F).

### Optics

The luminaire shall be provided with refractor type optics applied to each LED array. The luminaire shall provide Type \_\_\_\_ (2, 3, 4 or 5) light distribution per the IESNA classifications. Testing shall be done in accordance with IESNA LM-79.

**BLOC Optic:** An optional "Back Light Optical Control" shield can be provided at the factory. This is an internal optic level "House Side Shield" offering significantly reduced backlight

See next page



**SternbergLighting**

ESTABLISHED 1923 / EMPLOYEE OWNED

800-621-3376  
555 Lawrence Ave., Roselle, IL 60172  
info@sternberglighting.com  
www.sternberglighting.com

and glare while maintaining the original design aesthetics of the luminaire.

### Electronic Drivers

The LED driver shall be U.L. Recognized. It shall be securely mounted inside the fixture, for optimized performance and longevity. It shall be supplied with a quick-disconnect electrical connector on the power supply, providing easy power connections and fixture installation. It shall have overload, overheat and short circuit protection, and have a DC voltage output, constant current design, 50/60HZ. It shall be supplied with line-ground, line-neutral and neutral-ground electrical surge protection in accordance with IEEE/ANSI C62.41.2 guidelines. It shall be a high efficiency driver with a THD less than 20% and a high power factor greater than .9. It shall be dimming capable using a 0-10v signal, consult factory for more information.

### Photocontrols

**Button Style:** The photocontrol shall be mounted on the fixture and pre-wired to driver. The electronic button type photocontrol is instant on with a 5-10 second turn off, and shall turn on at 1.5 footcandles with a turn-off at 2-3 footcandles. Photocontrol is 120-277 volt and warranted for 6 years. This option removes the current IP rating. See pole spec sheet for pole mounted version.

**Twist-Lock Style:** The photocontrol shall be mounted externally on the fixture (1521LEDSM), or mounted on the hang-straight, and pre-wired to driver. The twist lock type photocontrol is instant on with a 3-6 second turn off, and shall turn on at 1.5 footcandles with a turn-off at 2-3 footcandles. Photocontrol is 120-277 volt and warranted for 6 years.


### Warranty

Seven-year limited warranty. See product and finish warranty guide for details.

### Finish


Refer to website for details.

## Fixtures

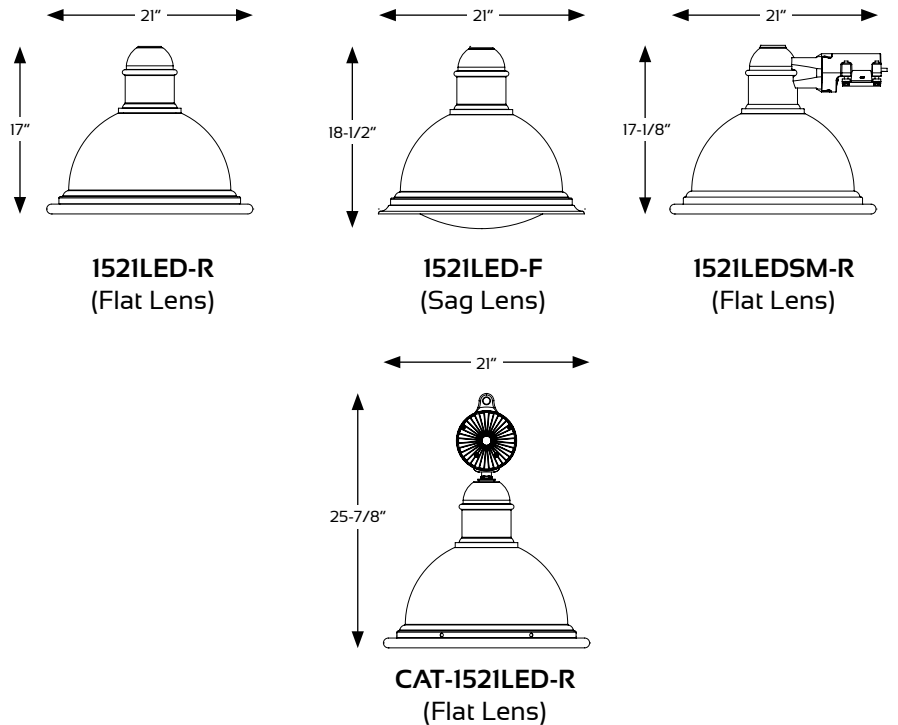


## Options

### R7-PE



Twist-lock receptacle with photocell

### PEC



Electronic button photocell

### FHD Fuse holder



# 1521LED OMEGA SERIES

LED

## Performance (Based on FG Lens)

MODEL #	T2 DELIVERED LUMENS	EFFICACY (LPW)	T3 DELIVERED LUMENS	EFFICACY (LPW)	T4 DELIVERED LUMENS	EFFICACY (LPW)	T5 DELIVERED LUMENS	EFFICACY (LPW)	WATTS
24L40T_-MDL014	10735	119.3	10800	120.0	9945	110.5	10680	118.7	90
24L30T_-MDL014	10235	113.7	10295	114.4	9480	105.3	10185	113.2	90
24L27T_-MDL014	9255	102.8	9310	103.4	8575	95.3	9205	102.3	90
16L40T_-MDL018	8880	111.0	8900	111.3	8285	103.6	8885	111.1	80
16L30T_-MDL018	8465	105.8	8485	106.1	7900	98.8	8470	105.9	80
16L27T_-MDL018	7655	95.7	7670	95.9	7140	89.3	7660	95.8	80
12L40T_-MDL018	6655	110.9	6705	111.8	6180	103.0	6625	110.4	60
12L30T_-MDL018	6345	105.8	6395	106.6	5890	98.2	6315	105.3	60
12L27T_-MDL018	5735	95.6	5780	96.3	5330	88.8	5710	95.2	60
12L40T_-MDL014	5430	118.0	5465	118.8	5030	109.3	5410	117.6	46
12L30T_-MDL014	5175	112.5	5210	113.3	4795	104.2	5160	112.2	46
12L27T_-MDL014	4680	101.7	4710	102.4	4335	94.2	4665	101.4	46
12L40T_-MDL008	3285	121.7	3300	122.2	3040	112.6	3260	120.7	27
12L30T_-MDL008	3130	115.9	3145	116.5	2900	107.4	3110	115.2	27
12L27T_-MDL008	2830	104.8	2845	105.4	2620	97.0	2810	104.1	27