

2600 VERNON SERIES

SPECIFICATIONS

GENERAL

The ___ ft tall* decorative post shall be aluminum, one-piece construction. The 20" diameter cast aluminum round pedestal base shall have a tall profile and be constructed with a ___ inch diameter aluminum shaft. The model shall be Sternberg Lighting #2600 or #2600R for candy cane poles. The pole shall be U.L. or E.T.L. listed in U.S. and Canada.

CONSTRUCTION

The base shall be designed with a cylindrically shaped lower section which gradually slopes to a curved upper section and shall be made of heavy wall, 356 alloy cast aluminum. It shall have a 1" thick floor cast as an integral part of the base. The shaft shall be externally welded circumferentially to the base.

___ The **smooth tapered shaft** shall be made of ASTM 6063 extruded aluminum and tempered to a T6 condition.

___ The **smooth straight shaft** shall be made of ASTM 6063 extruded aluminum and tempered to a T6 condition.


___ The **straight fluted shaft** shall be made of ASTM 6061 extruded aluminum and tempered to a T6 condition. It shall have a decorative fluted 3" O.D. tenon.

___ The **tapered fluted shaft** shall be made of heavy wall, 356 alloy cast aluminum.





INSTALLATION

Four 3/4" diameter, hot-dipped galvanized "L" type anchor bolts shall be provided with the post for anchorage. A door shall be provided for wiring and anchor bolt access. It shall be secured with tamper proof, stainless steel hardware. Post will be provided with a grounding stud mounted on the base floor opposite the access door.

Indicate the type of shaft needed (above)

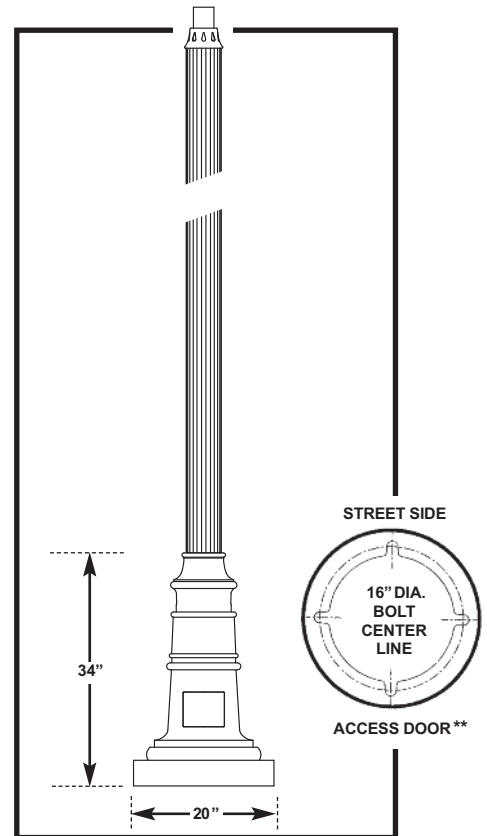

**See installation template for exact door position. Bolt circle dimensions may change on taller poles.

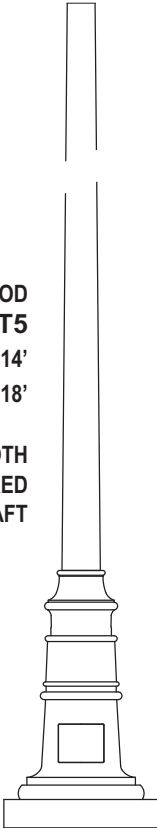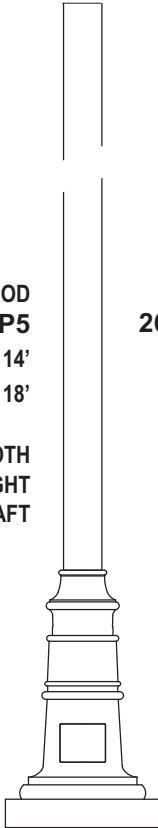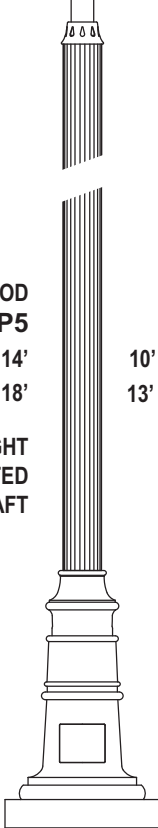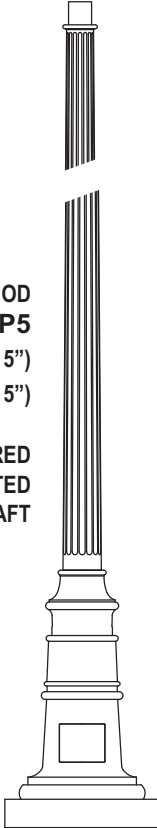Cast Aluminum-Extruded Poles		20" Diameter Base x 34" High	
<p>5"- 3" OD 26 __ - ' T5 10' 12' 14' 16' 18'</p> <p>SMOOTH TAPERED SHAFT</p> 	<p>5" OD 26 __ - ' P5 10' 12' 14' 16' 18'</p> <p>†SMOOTH STRAIGHT SHAFT</p> 	<p>5" OD 26 __ - ' FP5 10' 12' 14' 16' 18'</p> <p>†STRAIGHT FLUTED SHAFT</p> 	<p>5"- 3" OD 26 __ - ' TFP5 10' (10' 5") 11' (11' 5") 13' (13' 5") 15' (15' 5")</p> <p>TAPERED FLUTED SHAFT</p> 

* For candy cane poles insert ___ AG ft (feet - above grade height). See diagram on reverse side.

† Tenon not supplied if fixture or arm slips 5" O.D.

2600 VERNON SERIES

POSTS / OPTIONS / POST CAPS

BUILDING A PART NUMBER

Straight Poles

MODEL/HEIGHT/SHAFT	POST CAP CENTER	OPTIONS	FINISH
26 14 FP5	BCC	FH	BK

Candy Cane Poles

MODEL/HEIGHT/SHAFT	HEIGHT ABOVE GRADE	OPTIONS	FINISH
26 00 RT5	16 AG		BK

Part Number Selections

MODEL	HEIGHT	SHAFT [†]
• 26	• 08'	• T5: 5"-3" Tapered Smooth
	• 10'	• P5: 5" Straight Smooth
	• 11'	• FP5: 5" Straight Fluted
	• 12'	• TFP5: 5"-3" Tapered Fluted*
	• 13'	* Available in 10' (10' 3"), 11' (11' 3"),
	• 14'	13' (13' 3"), 15' (15' 3")
	• 15'	
	• 16'	
	• 18'	

OPTIONS AVAILABLE

- GFI • SBAR • PCD
- GFB • DSPA • SH
- FH • DHPA • SB
- SBA • PA478 • WHK
- DBA
- DB Direct Burial • HB Helix Burial

[†]See first page for height restriction.

Part Number Selections

MODEL	HEIGHT	SHAFT [†]	ABOVE GRADE
• 26	• 00	• RT5: 5"-3" Tapered Smooth	• 08' AG
		• RP5: 5" Straight Smooth	• 10' AG
		• RFP5: 5" Straight Fluted	• 12' AG
		• RTP5: 5"-3" Tapered Fluted*	• 14' AG
		* Available in 12', 13', 15', 17' AG	• 15' AG
			• 16' AG
			• 17' AG
			• 18' AG

STANDARD FINISHES*

- BKT Black Textured
- WHT White Textured
- PGT Park Green Textured
- ABZT Architectural Medium Bronze Textured
- DBT Dark Bronze Textured

*Smooth Finishes are available upon request



CUSTOM FINISHES

- OI Old Iron

- RT Rust
- WBR Weathered Brown
- CD Cedar
- WBK Weathered Black
- TT Two Tone












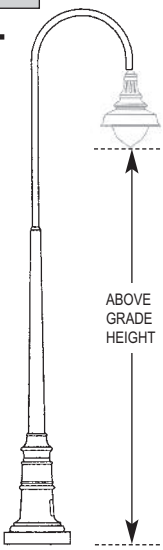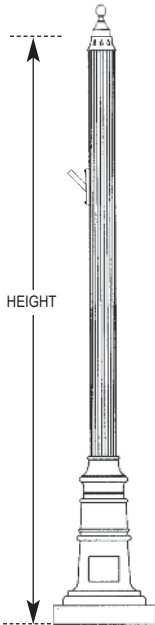

STERNBERG SELECT FINISHES

- VG Verde Green
- SI Swedish Iron
- OWGT Old World Gray Textured








OPTIONS AVAILABLE

See Accessories Section for more options and information

 <p>GFI - Ground Fault Interrupter mounts in the pole</p>  <p>GFB - Ground Fault Breaker <i>inside</i> base</p>  <p>FH - Flag Pole Holder mounts on the pole</p>  <p>SBA - Single Banner Arm mounts on the pole</p>  <p>DBA - Double Banner Arms mount on same side of the pole</p>	 <p>SBAR - Single Banner Arm and Ring</p>  <p>DSPA - Double Stepped Planter Arms mount on either side</p>  <p>DHPA - Double Hooked Planter Arms mount on either side</p>  <p>PA478 - Decorative Planter Arms with planter rings</p>	 <p>PCD - Photo Control mounts on door on pole</p>  <p>SH - Speaker Hub for mounting speaker, floodlight or signal</p>  <p>SB - Sign Bracket mounts on pole to hold signs</p>  <p>WHK - Wreath Hook mounts on pole to hold decorations</p>
--	---	--

POST CENTER CAPS (If Required)

 BCC - Ball Center Cap	 FCC - Finial Center Cap	 SCC - Spiked Center Cap	 TFCC - Tall Finial Center Cap	 SSCC - Side Spiked Center Cap
---	--	--	--	--