

3401LED GEORGETOWN LIGHTED BOLLARD SPECIFICATIONS

GENERAL

The Model 3401LED decorative lighted bollard shall be aluminum, one-piece construction. The 18" diameter hexagonal cast aluminum fluted base shall be constructed with a 5" diameter straight fluted aluminum shaft. The Model shall be Sternberg Lighting #3401LED, LED lighted bollard or #3401LED-QR quick release lighted bollard. The bollard shall be U.L. or E.T.L. listed in U.S. and Canada.*

CONSTRUCTION

The base shall be designed with a hexagonal lower section 3³/₈" tall and a pleated sculptured upper section terminated with a decorative ring and be made of heavy wall, alloy cast aluminum. It shall have a 3³/₄" thick floor cast as an integral part of the base. The extruded fluted shaft shall have 12 flat flutes and have a 3³/₁₆" wall thickness and shall be made of aluminum. The bollard cap will be cast aluminum. The overall height of the bollard shall be 47". (For other heights, consult factory).*

ELECTRICAL / LED

The optical assembly shall be constructed of twelve (12) fluted openings with a white acrylic lens. The LED light source shall have an IP65 rated assembly. The assembly shall consist of highly efficient, three (3) sided extruded aluminum heat sink, three (3) LED boards with 6 each high brightness LEDs and a sealed acrylic tube. The bollard shall be supplied with electrical surge protection in accord with IEEE/ANSI C62.41.2 and shall be U.L. or E.T.L. Listed in U.S. and Canada. The LED lighted bollard shall have an L70 expected life of 70,000 hours with the LED life ratings determined in accordance with IESNA LM-80. The electronic LED driver shall be a U.L. Recognized, constant current design with THD<20%.

QUICK RELEASE MOUNTING (Optional)

The Model 3401LED-QR shall have a quick release option which allows quick removal of the bollard for convenience or emergency access. The burial portion shall be made of aluminum extrusion and shall have a keyway and flexible connection system for securing to bollard. The bollard shall have a mated extension and anti-rotation key and padlock slot. The quick release system shall allow for a flush pavement installation after temporary bollard removal.


FINISH

Prior to coating, each assembly shall be chemically cleaned and etched in a 5-stage washing system which includes alkaline cleaning, rinsing, phosphoric etching, reverse osmosis water rinsing, and non-chrome sealing to ensure corrosion resistance and excellent adhesion for the finish coating. The finish coating shall be electrostatically applied semi-gloss, super durable polyester powder baked at 400 degrees for a durable and superior, color retentive finish. Our optional antique Verde Green finish and Swedish Iron finish are hand brushed using a 3-step process. The total assembly shall be wrapped in shockproof wrapping or fully enclosed in corrugated cartons.

INSTALLATION

Four, hot dipped galvanized "L" type anchor bolts shall be provided with the post for non-quick release bollard anchorage. Quick release anchorage requires no anchor bolts. A door shall be provided for wiring and anchor bolt access. It shall be secured with tamper-proof, stainless steel hardware. Bollard will be provided with a grounding stud mounted on the base floor opposite the access door.


WARRANTY Seven (7) year limited warranty. See product and finish warranty guide for details.

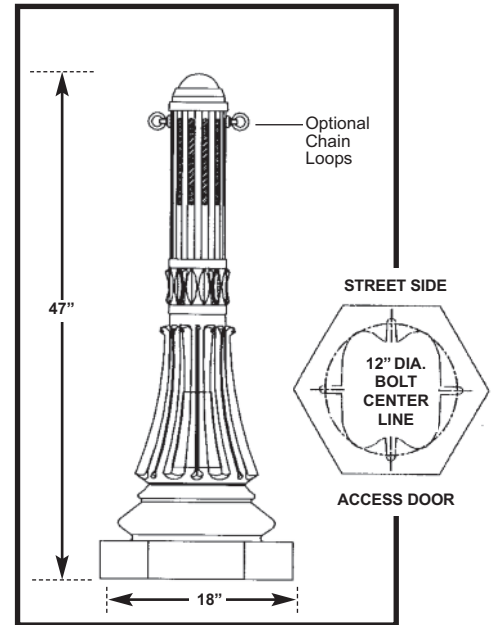

See installation template for exact door position.

BUILDING A PART NUMBER PART NUMBER SELECTIONS

<p>BOLLARD MODEL</p> <p>3401LED</p>	<p>OPTIONAL CHAIN LOOP</p> <p>CL2</p>	<p>LIGHT SOURCE</p> <p>3S45TLCA</p>	<p>OPTIONS</p> <p>ML / FHD / PG</p>	<p>FINISH</p> <p>PG</p>	<p>MODELS</p> <ul style="list-style-type: none"> • 3401LED • 3401LED-QR <p>DRIVERS</p> <ul style="list-style-type: none"> • ML-120-277V • MDL - Dimming 120-277V <p>OPTIONAL CHAIN LOOP</p> <ul style="list-style-type: none"> • CL1 Chain Loop • CL2 Chain Loops 180" 	<p>LIGHT SOURCES</p> <ul style="list-style-type: none"> • 3S 60TLCA 23W 6000K Type V • 3S 45TLCA 23W 4500K Type V • 3S 35TLCA 23W 3500K Type V <p>TO ORDER CHAIN: Specify total length of chain required for project.</p>	<p>STANDARD FINISHES*</p> <ul style="list-style-type: none"> • BKT Black Textured • WHT White Textured • PGT Park Green Textured • ABZT Architectural Medium Bronze Textured • DBT Dark Bronze Textured <p>*Smooth Finishes are available upon request</p> <p>CUSTOM FINISHES</p> <ul style="list-style-type: none"> • OI Old Iron • RT Rust <p>OPTIONS</p> <ul style="list-style-type: none"> • PEC1' Photocell-Bimetal 120 Volt • PEC2' Photocell-Bimetal 208-277 Volt • PEC1-E' Photocell-Electronic 120 Volt • PEC2-E' Photocell-Electronic 208-277 Volt • LP Low Power/Reduced Output 11W 	<ul style="list-style-type: none"> • WBR Weathered Brown • CD Cedar • WBK Weathered Black • TT Two Tone <p>STERNBERG SELECT FINISHES</p> <ul style="list-style-type: none"> • VG Verde Green • SI Swedish Iron • OWGT Old World Gray Textured <ul style="list-style-type: none"> • FHD Dual Fuses and Holder • GFI Ground Fault Interrupter Duplex Outlet¹ <p>¹GFI not available with QR option</p>
--------------------------------------------	----------------------------------------------	--------------------------------------------	--------------------------------------------	--------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------



*** NOTES**
U.L. listed components only. Bollard is not U.L. or E.T.L. listed with a photocell.