

3800 LEESBURG SERIES

SPECIFICATIONS

GENERAL

The ___ ft tall* decorative post shall be aluminum, one-piece construction. The 15" diameter cast aluminum fluted base shall be constructed with a ___ inch diameter extruded aluminum shaft. The model shall be Sternberg Lighting #3800 or #3800R for candy cane poles. The pole shall be U.L. or E.T.L. listed in U.S. and Canada.

CONSTRUCTION

The base shall be designed with a bell shaped lower base and upper base having fourteen flutes and be made of heavy wall, 356 alloy cast aluminum. It shall have a 7/8" thick floor cast as an integral part of the base. The shaft shall be triple circumferentially welded internally and externally to the base for added strength.


___ The **smooth tapered shaft** shall be made of ASTM 6063 extruded aluminum and tempered to a T6 condition.

___ The **smooth straight shaft** shall be made of ASTM 6063 extruded aluminum and tempered to a T6 condition.

___ The **straight fluted shaft** shall be made of ASTM 6061 extruded aluminum and tempered to a T6 condition. It shall have a decorative fluted 3" O.D. tenon.

INSTALLATION

Four 3/4" diameter, hot-dipped galvanized "L" type anchor bolts shall be provided with the post for anchorage. A door shall be provided for wiring and anchor bolt access. It shall be secured with tamper proof, stainless steel hardware. Post will be provided with a grounding stud mounted on the base floor opposite the access door.

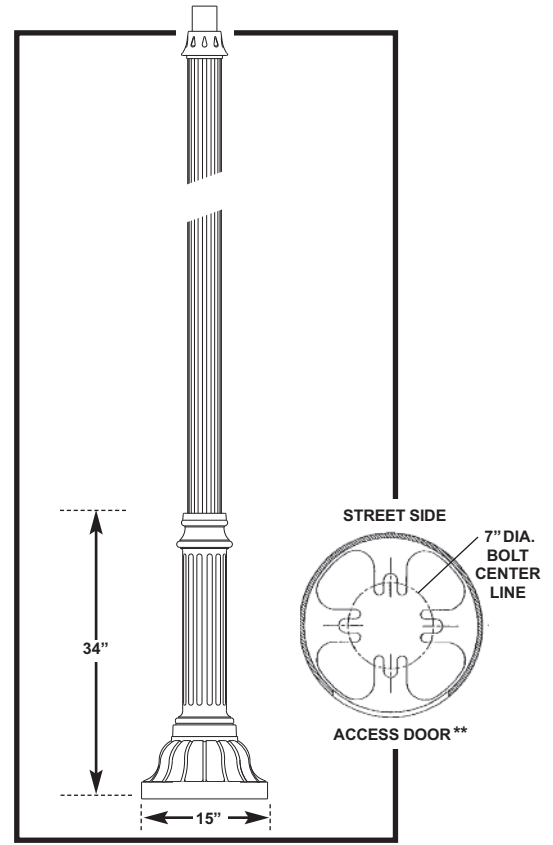

**See installation template for exact door position. Bolt circle dimensions may change on taller poles.

Indicate the type of shaft needed (above)

| Cast Aluminum-Extruded Poles | | 15" Diameter Base x 34" High | |
|--|--|---|---|
| <p>4" - 3" OD 38 __ ' T4 08' 10' 12' 14'</p> <p>SMOOTH TAPERED SHAFT</p> <p>† SMOOTH STRAIGHT SHAFT AVAILABLE SPECIFY AS: 4" OD 38 __ ' P4 08' 10' 12' 14'</p> | <p>5" - 3" OD 38 __ ' T5 08' 10' 12' 14' 16'</p> <p>SMOOTH TAPERED SHAFT</p> <p>† SMOOTH STRAIGHT SHAFT AVAILABLE SPECIFY AS: 5" OD 38 __ ' T5 08' 10' 12' 14' 16'</p> | <p>4" OD 38 __ ' FP4 08' 10' 12' 14'</p> <p>† STRAIGHT FLUTED SHAFT</p> | <p>5" OD 38 __ ' FP5 08' 10' 12' 14' 16'</p> <p>† STRAIGHT FLUTED SHAFT</p> |

*For candy cane poles insert ___ AG ft (feet - above grade height). See diagram on reverse side.

† Tenon not supplied if fixture or arm slip shaft O.D.

3800 LEESBURG SERIES

POSTS / OPTIONS / POST CAPS

BUILDING A PART NUMBER

Straight Poles

| MODEL / HEIGHT / SHAFT | POST CAP CENTER | OPTIONS | FINISH |
|------------------------|-----------------|---------|--------|
| 38 12 FP4 | BCC | FH | BK |

Candy Cane Poles

| MODEL / HEIGHT / SHAFT | HEIGHT ABOVE GRADE | OPTIONS | FINISH |
|------------------------|--------------------|---------|--------|
| 38 00 RT4 | 12 AG | | BK |

Part Number Selections

| MODEL | HEIGHT | SHAFT |
|------------|---|--|
| • 38 | • 08' • 10' • 12' • 14' • 16' | • T4: 4"-3" Tapered Smooth* • T5: 5"-3" Tapered Smooth • P4: 4" Straight Smooth • P5: 5" Straight Smooth • FP4: 4" Straight Fluted* • FP5: 5" Straight Fluted |
| FP4 - 4" | FP5 - 5" | |
| T4 - 4"-3" | T5 - 5"-3" | |

*Maximum recommended height 14'

OPTIONS AVAILABLE

| | | |
|--------------------|-------------------|-------|
| • GFI | • SBAR | • PCD |
| • GFB | • DSPA | • SH |
| • FH | • DHPA | • SB |
| • SBA | • PA478 | • WHK |
| • DBA | | |
| • DB Direct Burial | • HB Helix Burial | |

Part Number Selections

| MODEL | HEIGHT | SHAFT | ABOVE GRADE |
|-------|--------|--|--|
| • 38 | • 00 | • RT4: 4"-3" Tapered Smooth • RT5: 5"-3" Tapered Smooth • RP4: 4" Straight Smooth • RP5: 5" Straight Smooth • RFP4: 4" Straight Fluted • RFP5: 5" Straight Fluted | • 08' AG • 10' AG • 12' AG • 14' AG • 16' AG |

POST CENTER CAP
(If Required)

- BCC
- FCC
- SCC
- TFCC
- SSCC

STANDARD FINISHES*

- BKT Black Textured
 - WHT White Textured
 - PGT Park Green Textured
 - ABZT Architectural Medium Bronze Textured
 - DBT Dark Bronze Textured
- *Smooth Finishes are available upon request



CUSTOM FINISHES

- OI Old Iron

- RT Rust
- WBR Weathered Brown
- CD Cedar
- WBK Weathered Black
- TT Two Tone

STERNBERG SELECT FINISHES

- VG Verde Green
- SI Swedish Iron
- OWGT Old World Gray Textured

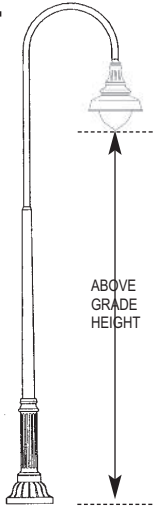

OPTIONS AVAILABLE

See Accessories Section for more options and information

| | | | | | |
|--|--|--|---|--|--|
| | GFI - Ground Fault Interrupter mounts in the pole | | SBAR -Single Banner Arm and Ring | | PCD - Photo Control mounts on door on pole |
| | GFB - Ground Fault Breaker <i>inside</i> base | | DSPA -Double Stepped Planter Arms mount on either side | | SH - Speaker Hub for mounting speaker, floodlight or signal |
| | FH - Flag Pole Holder mounts on the pole | | DHPA -Double Hooked Planter Arms mount on either side | | SB - Sign Bracket mounts on pole to hold signs |
| | SBA - Single Banner Arm mounts on the pole | | PA478 -Decorative Planter Arms with planter rings | | WHK - Wreath Hook mounts on pole to hold decorations |
| | DBA - Double Banner Arms mount on same side of the pole | | | | |

POST CENTER CAPS (If Required)

| | | | | | | | | | |
|--|------------------------------|--|--------------------------------|--|--------------------------------|--|--------------------------------------|--|--------------------------------------|
| | BCC - Ball Center Cap | | FCC - Finial Center Cap | | SCC - Spiked Center Cap | | TFCC - Tall Finial Center Cap | | SSCC - Side Spiked Center Cap |
|--|------------------------------|--|--------------------------------|--|--------------------------------|--|--------------------------------------|--|--------------------------------------|