

4200 AUGUSTA SERIES

SPECIFICATIONS

GENERAL

The ____ ft tall* decorative post shall be aluminum, one-piece construction. The 17" diameter cast aluminum fluted base shall be constructed with a ____ inch diameter aluminum shaft. The model shall be Sternberg Lighting #4200 or #4200R for candy cane poles. The pole shall be U.L. or E.T.L. listed in U.S. and Canada.

CONSTRUCTION

The base shall be designed with twelve curved flutes and teardrop decorations and be made of heavy wall, 356 alloy cast aluminum. It shall have a 3/4" thick floor cast as an integral part of the base. The shaft shall be double circumferentially welded internally and externally to the base for added strength.

____ The **smooth tapered shaft** shall be made of ASTM 6063 extruded aluminum and tempered to a T6 condition.

____ The **smooth straight shaft** shall be made of ASTM 6063 extruded aluminum and tempered to a T6 condition.


____ The **straight fluted shaft** shall be made of ASTM 6061 extruded aluminum and tempered to a T6 condition. It shall have a decorative fluted 3" O.D. tenon.

____ The **tapered fluted shaft** shall be made of heavy wall, 356 alloy cast aluminum.

INSTALLATION

Four 1/2" diameter, hot-dipped galvanized "L" type anchor bolts shall be provided with the post for anchorage. A door shall be provided for wiring and anchor bolt access. It shall be secured with tamper proof, stainless steel hardware. Post will be provided with a grounding stud mounted on the base floor opposite the access door.

Indicate the type of shaft needed (above)

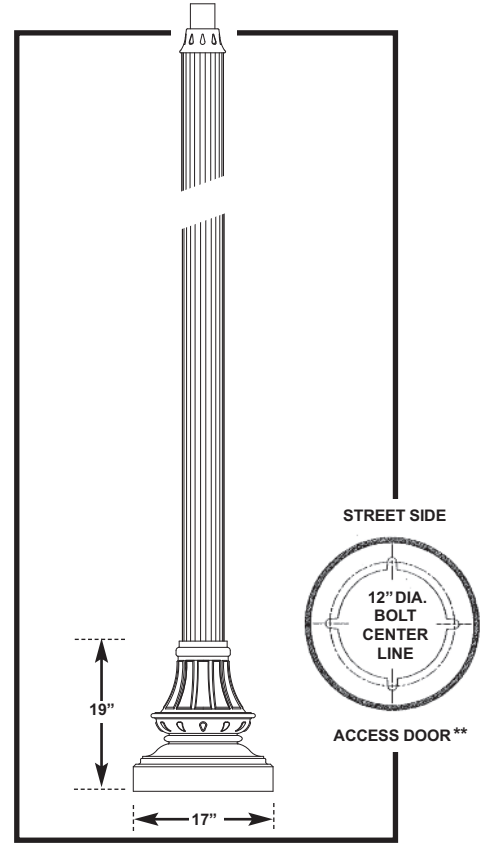

**See installation template for exact door position. Bolt circle dimensions may change on taller poles.

Cast Aluminum-Extruded Poles			17" Diameter Base x 19" High		
4"- 3" OD	5"- 3" OD	4" OD	5" OD	5'- 3" OD	
42 __ ' T4	42 __ ' T5	42 __ ' FP4	42 __ ' FP5	42 __ ' TFP5	
08' 10'	08' 10' 12'	08' 10'	08' 10' 12'	09' 10'	
12' 14'	14' 16'	12' 14"	14' 16'	12' 14'	
SMOOTH TAPERED SHAFT	SMOOTH TAPERED SHAFT	† STRAIGHT FLUTED SHAFT	† STRAIGHT FLUTED SHAFT	TAPERED FLUTED SHAFT	
SMOOTH STRAIGHT SHAFT	† SMOOTH STRAIGHT SHAFT				
AVAILABLE SPECIFY AS:	AVAILABLE SPECIFY AS:				
4" OD	5" OD				
42 __ ' P4	42 __ ' P5				

*For candy cane poles insert ____ AG ft (feet - above grade height). See diagram on reverse side.

† Tenon not supplied if fixture or arm slips shaft O.D.

4200 AUGUSTA SERIES

POSTS / OPTIONS / POST CAPS

BUILDING A PART NUMBER

Straight Poles


MODEL / HEIGHT / SHAFT	POST CAP	OPTIONS	FINISH
	CENTER		
42 / 12 / FP4	BCC	FH	BK

Candy Cane Poles

MODEL / HEIGHT / SHAFT	HEIGHT ABOVE GRADE	OPTIONS	FINISH
42 / 00 / RT4	12 AG		BK

Part Number Selections

MODEL	HEIGHT	SHAFT
• 42	• 08' • 09' • 10' • 12' • 14' • 16'	• T4: 4"-3" Tapered Smooth* • T5: 5"-3" Tapered Smooth • P4: 4" Straight Smooth • P5: 5" Straight Smooth • FP4: 4" Straight Fluted* • FP5: 5" Straight Fluted • TFP5: 5"-3" Tapered Fluted**



* Maximum recommended height 14'
** Available in 9', 10', 12', 14'

OPTIONS AVAILABLE

- GFI
- GFB
- FH
- SBA
- DBA
- DB Direct Burial
- SBAR
- DSPA
- DHPA
- PA478
- PCD
- SH
- SB
- WHK
- HB Helix Burial

Part Number Selections

MODEL	HEIGHT	SHAFT	ABOVE GRADE
• 42	• 00	• RT4: 4"-3" Tapered Smooth • RT5: 5"-3" Tapered Smooth • RP4: 4" Straight Smooth • RP5: 5" Straight Smooth • RFP4: 4" Straight Fluted • RFP5: 5" Straight Fluted • RTFP5: 5"-3" Tapered Fluted**	• 08' AG • 10' AG • 11' AG • 12' AG • 13' AG • 14' AG • 15' AG • 16' AG

** Available in 11', 12', 14', 16, AG

POST CENTER CAP

- BCC (If Required)
- FCC
- SCC
- TFCC
- SSSC

STANDARD FINISHES*

- BKT Black Textured
 - WHT White Textured
 - PGT Park Green Textured
 - ABZT Architectural Medium Bronze Textured
 - DBT Dark Bronze Textured
- *Smooth Finishes are available upon request



CUSTOM FINISHES

- OI Old Iron

- RT Rust
- WBR Weathered Brown
- CD Cedar
- WBK Weathered Black
- TT Two Tone












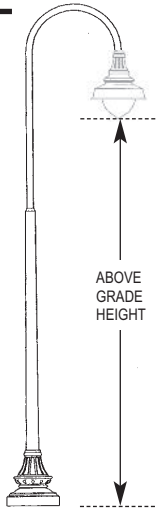

STERNBERG SELECT FINISHES

- VG Verde Green
- SI Swedish Iron
- OWGT Old World Gray Textured








OPTIONS AVAILABLE

See Accessories Section for more options and information

 GFI - Ground Fault Interrupter mounts in the pole  GFB - Ground Fault Breaker <i>inside</i> base  FH - Flag Pole Holder mounts on the pole  SBA - Single Banner Arm mounts on the pole  DBA - Double Banner Arms mount on same side of the pole	 SBAR - Single Banner Arm and Ring  DSPA - Double Stepped Planter Arms mount on either side  DHPA - Double Hooked Planter Arms mount on either side  PA478 - Decorative Planter Arms with planter rings	 PCD - Photo Control mounts on door on pole  SH - Speaker Hub for mounting speaker, floodlight or signal  SB - Sign Bracket mounts on pole to hold signs  WHK - Wreath Hook mounts on pole to hold decorations
--	--	---

POST CENTER CAPS (If Required)

-  **BCC** - Ball Center Cap
-  **FCC** - Finial Center Cap
-  **SCC** - Spiked Center Cap
-  **TFCC** - Tall Finial Center Cap
-  **SSCC** - Side Spiked Center Cap