

4800 SPRINGFIELD SERIES

SPECIFICATIONS

GENERAL

The ___ ft tall* decorative post shall be aluminum, one-piece construction. The 10 1/2" octagonal cast aluminum, round fluted base shall be constructed with a ___ inch diameter extruded aluminum shaft. The model shall be Sternberg Lighting #4800 or #4800R for candy cane poles. The pole shall be U.L. or E.T.L. listed in U.S. and Canada.

CONSTRUCTION

The base shall be designed with octagonal stepped base transitioning into a tapered sixteen flute top section and be made of heavy wall, 356 alloy cast aluminum. It shall have a 3/4" thick floor cast as an integral part of the base. The shaft shall be externally welded circumferentially to the base.

___ The **smooth tapered shaft** shall be made of ASTM 6063 extruded aluminum and tempered to a T6 condition.


___ The **smooth straight shaft** shall be made of ASTM 6063 extruded aluminum and tempered to a T6 condition.

___ The **straight fluted shaft** shall be made of ASTM 6061 extruded aluminum and tempered to a T6 condition. It shall have a decorative fluted 3" O.D. tenon.

INSTALLATION

Four 1/2" diameter, hot-dipped galvanized "L" type anchor bolts shall be provided with the post for anchorage. A door shall be provided for wiring and anchor bolt access. It shall be secured with tamper proof, stainless steel hardware. Post will be provided with a grounding stud mounted on the base floor opposite the access door.

Indicate the type of shaft needed (above)

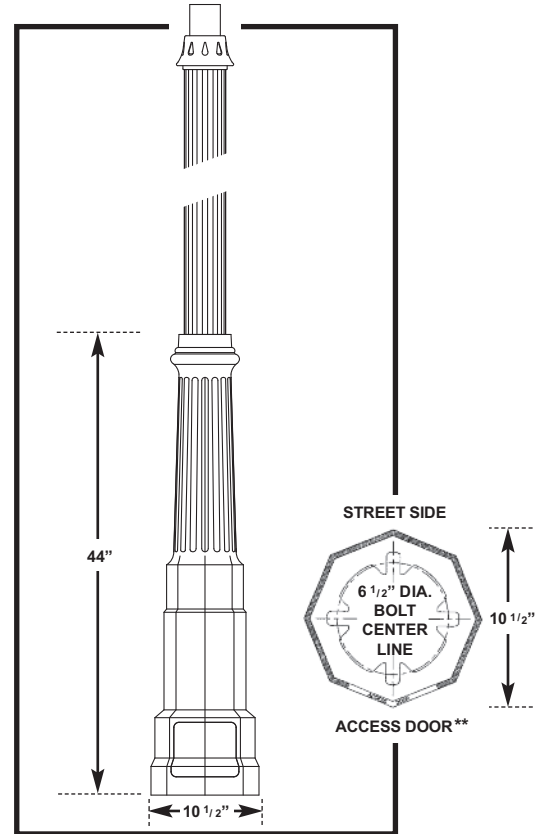

**See installation template for exact door position. Bolt circle dimensions may change on taller poles.

| Cast Aluminum - Extruded Poles | | 10 1/2" Diameter Base x 44" High | |
|---|---|---|---|
| <p>4"- 3" OD 48 __ ' T4 08' 10' 12' 14' 16'</p> <p>SMOOTH TAPERED SHAFT</p> <p>† SMOOTH STRAIGHT SHAFT AVAILABLE SPECIFY AS: 4" OD 48 __ ' P4</p> | <p>5"- 3" OD 48 __ ' T5 08' 10' 12' 14' 16'</p> <p>SMOOTH TAPERED SHAFT</p> <p>† SMOOTH STRAIGHT SHAFT AVAILABLE SPECIFY AS: 5" OD 48 __ ' P5</p> | <p>4" OD 48 __ ' FP4 08' 10' 12' 14' 16'</p> <p>† STRAIGHT FLUTED SHAFT</p> | <p>5" OD 48 __ ' FP5 08' 10' 12' 14' 16'</p> <p>† STRAIGHT FLUTED SHAFT</p> |

*For candy cane poles insert ___ AG ft (feet - above grade height). See diagram on reverse side.

† Tenon not supplied if fixture or arm slips shaft O.D.

4800 SPRINGFIELD SERIES

POSTS / OPTIONS / POST CAPS

BUILDING A PART NUMBER

Straight Poles


| MODEL / HEIGHT / SHAFT | POST CAP CENTER | OPTIONS | FINISH |
|------------------------|-----------------|---------|--------|
| 48 12 FP4 | BCC | FH | BK |

Candy Cane Poles

| MODEL / HEIGHT / SHAFT | HEIGHT ABOVE GRADE | OPTIONS | FINISH |
|------------------------|--------------------|---------|--------|
| 48 00 RT4 | 12 AG | | BK |

Part Number Selections

| MODEL | HEIGHT | SHAFT |
|-------|--------|-----------------------------|
| • 48 | • 08' | • T4: 4"-3" Tapered Smooth* |
| | • 10' | • T5: 5"-3" Tapered Smooth |
| | • 12' | • P4: 4" Straight Smooth |
| | • 14' | • P5: 5" Straight Smooth |
| | • 16' | • FP4: 4" Straight Fluted* |
| | | • FP5: 5" Straight Fluted |



*Maximum recommended height 14'

OPTIONS AVAILABLE

- GFI
- GFB
- FH
- SBA
- DBA
- DB Direct Burial
- SBAR
- DSPA
- DHPA
- PA478
- PC
- SH
- SB
- WHK
- HB Helix Burial

POST CENTER CAP

(If Required)

- BCC
- FCC
- SCC
- TFCC
- SSCC

Part Number Selections

| MODEL | HEIGHT | SHAFT | ABOVE GRADE |
|-------|--------|-----------------------------|-------------|
| • 48 | • 00 | • RT4: 4"-3" Tapered Smooth | • 08' AG |
| | | • RT5: 5"-3" Tapered Smooth | • 10' AG |
| | | • RP4: 4" Straight Smooth | • 12' AG |
| | | • RP5: 5" Straight Smooth | • 14' AG |
| | | • RFP4: 4" Straight Fluted | • 16' AG |
| | | • RFP5: 5" Straight Fluted | |

STANDARD FINISHES*

- BKT Black Textured
- WHT White Textured
- PGT Park Green Textured
- ABZT Architectural Medium Bronze Textured
- DBT Dark Bronze Textured

*Smooth Finishes are available upon request



CUSTOM FINISHES

- OI Old Iron

- RT Rust
- WBR Weathered Brown
- CD Cedar
- WBK Weathered Black
- TT Two Tone













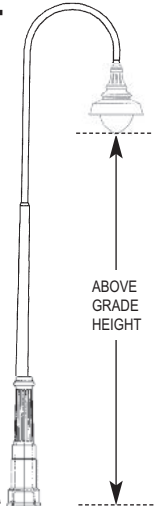
STERNBERG SELECT FINISHES

- VG Verde Green
- SI Swedish Iron
- OWGT Old World Gray Textured








OPTIONS AVAILABLE

See Accessories Section for more options and information

| | | |
|--|---|--|
|  <p>GFI - Ground Fault Interrupter mounts in the pole</p>  <p>GFB - Ground Fault Breaker <i>inside</i> base</p>  <p>FH - Flag Pole Holder mounts on the pole</p>  <p>SBA - Single Banner Arm mounts on the pole</p>  <p>DBA - Double Banner Arms mount on same side of the pole</p> |  <p>SBAR - Single Banner Arm and Ring</p>  <p>DSPA - Double Stepped Planter Arms mount on either side</p>  <p>DHPA - Double Hooked Planter Arms mount on either side</p>  <p>PA478 - Decorative Planter Arms with planter rings</p> |  <p>PCD - Photo Control mounts on door on pole</p>  <p>SH - Speaker Hub for mounting speaker, floodlight or signal</p>  <p>SB - Sign Bracket mounts on pole to hold signs</p>  <p>WHK - Wreath Hook mounts on pole to hold decorations</p> |
|--|---|--|

POST CENTER CAPS (If Required)

| | | | | |
|--|---|---|---|---|
|  <p>BCC - Ball Center Cap</p> |  <p>FCC - Finial Center Cap</p> |  <p>SCC - Spiked Center Cap</p> |  <p>TFCC - Tall Finial Center Cap</p> |  <p>SSCC - Side Spiked Center Cap</p> |
|--|---|---|---|---|