


RESIDENTIAL POLES

SPECIFICATIONS

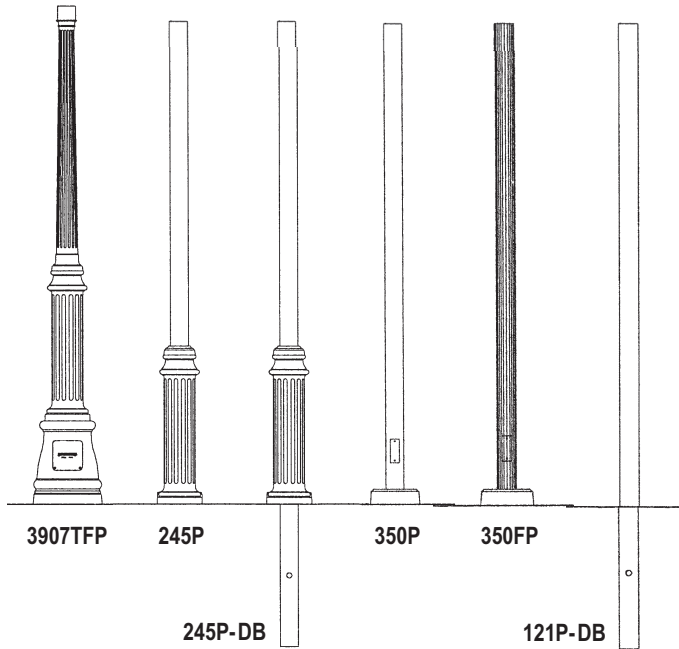

Cat. No.	Shaft	Above Grade	Tenon Dia.	Base Height	Base Dia.	Type of Mounting
3907TFP	Tapered Fluted	7'	3"	41"	11 1/2"	AB
245P	Smooth	6'6"	3"	25"	7 1/2"	AB
245P-DB	Smooth	6'6"	3"	25"	7 1/2"	DB
350P	Smooth	6'6"	3"	2 1/2"	8 1/4"	AB
350FP	Fluted	6'6"	3"	2 1/2"	8 1/4"	AB
121P-DB	Smooth	6'6"	3"	—	—	DB
228FP	Fluted	6'6"	3"	26 1/2"	7 1/2"	AB
228FP-DB	Fluted	6'6"	3"	26 1/2"	7 1/2"	DB
125P-DB	Fluted	6'6"	3"	—	—	DB
4SQX	Square	6'6"	4"	2"	10"	AB
4SQX-DB	Square	6'6"	4"	2"	10"	DB
230TFP	Tapered Fluted	5'9"	3"	26 1/2"	7 1/2"	AB
230TFP-LR	Tapered Fluted w/Ladder Rest	5'9"	3"	26 1/2"	7 1/2"	AB

AB = Anchor Bolt Mount DB = Direct Burial Mount.
Photocells and/or convenience outlets can be supplied. All heights are above grade (ground level); for overall post length add 18" for burial. The straight shaft models are available in custom heights. Consult the factory for your specific requirements.

