

RW3xx RIALTA BOLLARD

LED BOLLARDS



DIMENSIONS
6" Ø
36" to 48" TALL

7 YEAR WARRANTY

LUMEN RANGE
1890 to 2050

LIFE SPAN
L70
MINIMUM
100,000 HOURS

UL LISTED

CLICK FOR FAQ's

JOB NAME _____

FIXTURE TYPE _____

MEMO _____

BUILD A PART NUMBER

ORDERING EXAMPLE: **RW3-36-6L40TS-MDL05/BKT**

Model	Overall Height (In Inches)	LED	CCT	Distribution Type	Driver	Option Photocell	Option Fuse	Finish

Model

• RW3

Overall Height (In Inches)

• 36 • 42 • 48

LED

• 6L

CCT - Color Temperature (K)

• 27(00) • 30(00) • 40(00) • 50(00)

Distribution Type

• TS (Symmetric)

Driver

• MDL05 (120v-277v, 480mA)
• MDH05 (347v-480v, 480mA)

Options (Click here to view paint options sheet)

• PEC Electronic Button Photocontrol (120v-277v)
• PEC4 Electronic Button Photocontrol (480v)
• FHD¹ Double Fuse and Holder

¹Ships loose for installation in base.

Finish

Standard Urban Finishes
(Click here to view paint finish sheet)

• UGMT Gun Metal Textured
• UGM Gun Metal Matte
• UBT Urban Bronze Textured
• UB Urban Bronze Matte
• ULBT Urban Light Bronze Textured
• ULB Urban Light Bronze Matte
• USLT Urban Silver Textured
• USL Urban Silver Matte
• UWHT Urban White Textured
• UWH Urban White Matte

• UCHS Urban Champagne Satin Smooth
• BKT Black Textured

Custom Urban Finish²

• CM Custom Match

²Custom colors require upcharge.

Specifications

General

The RW3xx bollard is a cylindrical luminaire offered in a variety of heights. Designed to bring ambiance to any project by providing a performance lighting package in a vertical form. The 6" bollard adds a 15" high luminous element. The RW3xx uses a Six LED board configuration to deliver a symmetrical distribution with high efficiency and low wattage consumption. The Luminaire shall be UL listed in US and Canada.

LED's

The luminaire shall use high output, high brightness LED's. They shall be mounted in arrays, on printed circuit boards designed to maximize heat transfer to the heat sink surface. The LED's and printed circuit boards shall be 100% recyclable; they shall also be protected from moisture and corrosion by a conformal coating of 1 to 3 mils. They shall not contain lead, mercury or any other hazardous substances and shall be RoHS compliant. The LED life rating data shall be determined in accordance with IESNA LM-80. The High Performance white LED's will have a life expectancy of approximately 100,000 hours with not less than 70% of original brightness (lumen maintenance), rated at 25°C. The High Brightness, High Output LED's shall be 4000K (5000K, 3000K or 2700K option) color temperature with a minimum CRI of 70. Consult factory for custom color CCT. The luminaire shall have a

minimum _____ (see table) delivered initial lumen rating when operated at steady state with an average ambient temperature of 25°C (77°F).

Optics

The luminaire shall be provided with individual, collimating type optics applied to each LED. The luminaire shall provide a symmetric distribution with near perfect surface brightness and uniformity.

Electronic Driver

The LED driver shall be U.L. Recognized. It shall be securely mounted inside the bollard, for optimized performance and longevity. It shall be supplied with a quick-disconnect electrical connector on the power supply, providing easy power connections and fixture installation. It shall have overload as well as short circuit protection, and have a DC voltage output, constant current design, 50/60HZ. It shall be supplied with line-ground, line-neutral and neutral-ground electrical surge protection in accordance with IEEE/ANSI C62.41.2 guidelines. It shall be dimmable using a 0-10v signal. The driver shall have a minimum efficiency of 88%.

Installation

Four 5/8" diameter, hot-dipped galvanized "L" type anchor bolts shall be provided with the post for anchorage, they shall be mounted in a 3-1/4" bolt circle. A door shall be provided for wiring and anchor bolt access. It shall be secured with tamper proof stainless steel hardware. Post will be provided with a grounding stud mounted behind the access door.

See next page

RW3xx RIALTA BOLLARD

LED BOLLARDS

Photocontrols



Button Style: The photocontrol shall be mounted on an access door and pre-wired to driver. The electronic button type photocontrol is instant on with a 5-10 second turn off, and shall turn on at 1.5 footcandles with a turn-off at 2-3 footcandles. Photocontrol is 120-277 volt and warranted for 6 years.

Warranty


Seven-year limited warranty. See product and finish warranty guide for details.

Finish

Refer to website for details.

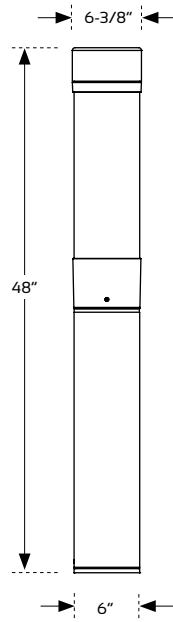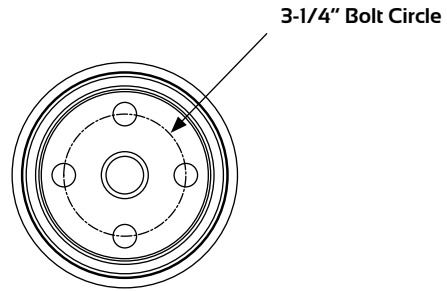

RW348

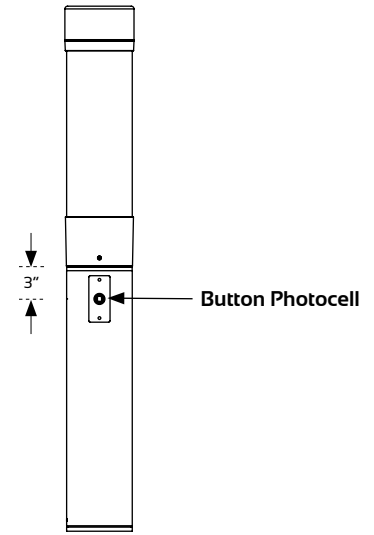

PEC
Optional Photocell

Performance

Model #	TS LUMENS	EFFICACY (LPW)	WATTAGE
RW3xx-6L40TS-MDL05	2050	46.6	44
RW3xx-6L30TS-MDL05	1955	44.4	44
RW3xx-6L27TS-MDL05	1890	43.0	44