

# 10' TO 30' ROUND STRAIGHT STEEL POLES (RSS)

Job Name

Client Name

Job Location

Created By

Date

Product



Quote

Customer Approval

Date

Sternberg Model	Pole Height	Shaft Size	Wall Thickness	Slotted Base Width	Hand-hole Size	Weight Lbs	Bolt Circle	Bolt Proj +/- .25	DBL Nutted Anchor bolt ASTM F1554 GRADE 55 Galv thread	Max Loading Capacities								Base Cover Options
										90 MPH w/1.3 Gust		110MPH w/1.3 Gust		130MPH w/1.3 Gust		150MPH w/1.3 Gust		
										MAX EPA 1 (SQ FT)	MAX WEIGHT (lbs)	MAX EPA 1 (SQ FT)	MAX WEIGHT (lbs)	MAX EPA 1 (SQ FT)	MAX WEIGHT (lbs)	MAX EPA 1 (SQ FT)	MAX WEIGHT (lbs)	
RSS10F400	10	4	11GA	10.5	2.5 x 5	70	8"	3.5	3/4"	15.0	375	9.9	275	7.0	200	5.2	150	2400-4, SL900-4
RSS12F400	12	4	11GA	10.5	2.5 x 5	80	8"	3.5	3/4"	11.8	300	7.8	200	5.5	150	4.0	100	2400-4, SL900-4
RSS14F400	14	4	11GA	10.5	2.5 x 5	90	8"	3.5	3/4"	9.4	250	6.2	175	4.3	125	3.1	100	2400-4, SL900-4
RSS16F400	16	4	11GA	10.5	2.5 x 5	100	8"	3.5	3/4"	7.4	185	4.8	125	3.3	85	2.3	75	2400-4, SL900-4
RSS16F450	16	4.5	11GA	10.5	2.5 x 5	105	8"	3.5	3/4"	10.2	265	6.7	175	4.7	125	3.4	100	2400-4.5, SL900-5
RSS18F400	18	4	11GA	10.5	2.5 x 5	110	8"	3.5	3/4"	5.7	180	3.6	100	2.4	75	1.7	50	2400-4, SL900-4
RSS18F450	18	4.5	11GA	10.5	2.5 x 5	115	8"	3.5	3/4"	8.2	210	5.3	150	3.7	100	2.6	85	2400-4.5, SL900-5
RSS20F400	20	4	11GA	10.5	2.5 x 5	120	8"	3.5	3/4"	4.4	150	2.7	75	1.7	70	1.2	45	2400-4, SL900-4
RSS20F500	20	5	11GA	10.5	2.5 x 5	145	8"	3.5	3/4"	9.1	230	5.9	150	4.0	125	2.6	100	2400-5, SL900-5
RSS25F400	25	4	11GA	10.5	2.5 x 5	145	8"	3.5	3/4"	1.9	75	1.0	65	0.4	50	-	-	2400-4, SL900-4
RSS25F500	25	5	11GA	10.5	2.5 x 5	180	8"	3.5	3/4"	5.5	150	3.4	125	2.1	100	1.1	75	2400-5, SL900-5
RSS25N500	25	5	7GA	10.5	2.5 x 5	260	8"	3.5	3/4"	9.4	250	6.0	150	4.1	110	2.5	100	2400-5, SL900-5
RSS30F500	30	5	11GA	10.5	2.5 x 5	210	8"	3.5	3/4"	3.0	125	1.7	100	0.8	65	-	-	2400-5, SL900-5
RSS30N500	30	5	7GA	10.5	2.5 x 5	305	8"	3.5	3/4"	6.5	160	3.8	110	2.3	100	1.1	70	2400-5, SL900-5

CROSS SECTION	MODEL NUMBER	FIXTURE MOUNTING	BASE COVER	OPTIONS	COLOR
<b>RSS</b>					
RSS = Round Straight Steel	RSS10F400 RSS20F400 RSS12F400 RSS20F500 RSS14F400 RSS25F400 RSS16F400 RSS25F500 RSS16F450 RSS25N500 RSS18F400 RSS30F500 RSS18F450 RSS30N500	<b>Arm Mounting</b> D1 = 1 Luminaire D2 = 2 @ 180° D3 = 3 @ 120° D4 = 4 @ 90° D5 = 2 @ 90° D6 = 3 @ 90°  <b>Tenon Mounting</b> P2 = 2.38" OD x 4.00" P3 = 3.00" OD x 3.00" P4 = 4.00" OD x 6.00" P5 = 4.50" OD x 3.50" P6 = 3.50" OD x 3.50"	2400-4 2400-4.5 2400-5 SL900-4 SL900-5	See Accessories at <a href="http://www.sternberglighting.com">www.sternberglighting.com</a> (Please specify with code)	<b>UGMT</b> - Urban Gun Metal Textured <b>UGM</b> - Urban Gun Metal Matte <b>UBT</b> - Urban Bronze Textured <b>ULBT</b> - Urban Light Bronze Textured <b>ULST</b> - Urban Silver Textured <b>UWHT</b> - Urban White Textured <b>UCHS</b> - Urban Champagne Satin Smooth <b>UB</b> - Urban Bronze Matte <b>ULB</b> - Urban Light Bronze Matte <b>USL</b> - Urban Silver Matte <b>UWH</b> - Urban White Matte <b>BKT</b> - Black Textured

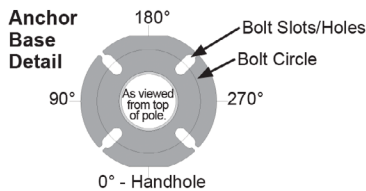

### OPTIONAL BASE COVERS

