

4700 AUSTIN SERIES

SPECIFICATIONS

GENERAL

The ___ ft tall* decorative post shall be aluminum, one-piece construction. The 10" square cast aluminum round fluted base shall be constructed with a ___ inch diameter aluminum shaft. The model shall be Sternberg Lighting #4700 or #4700R for candy cane poles. The pole shall be U.L. or E.T.L. listed in U.S. and Canada.

CONSTRUCTION

The base shall be designed with a square lower base which transitions to an upper base having twelve flutes and be made of heavy wall, 356 alloy cast aluminum. It shall have a 1" thick floor cast as an integral part of the base. The shaft shall be externally welded circumferentially to the base.

____ The **smooth tapered shaft** shall be made of ASTM 6063 extruded aluminum and tempered to a T6 condition.

____ The **smooth straight shaft** shall be made of ASTM 6063 extruded aluminum and tempered to a T6 condition.


The **straight fluted shaft** shall be made of ASTM 6061 extruded aluminumand tempered to a T6 condition. It shall have a decorative fluted 3" O.D. tenon.

The **tapered fluted shaft** shall be made of heavy wall, 356 alloy cast aluminum.


INSTALLATION

Four ⁵/₈" diameter, hot-dipped galvanized "L" type anchor bolts shall be provided with the post for anchorage. A door shall be provided for wiring and anchor bolt access. It shall be secured with tamper proof, stainless steel hardware. Post will be provided with a grounding stud mounted on the base floor opposite the access door.

Indicate the type of shaft needed (above)

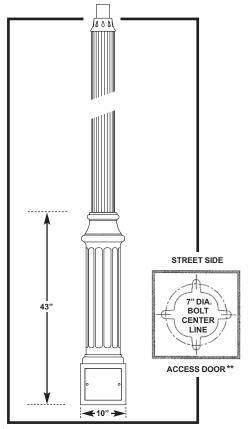


**See installation template for exact door position. Bolt circle dimensions may change on taller poles.

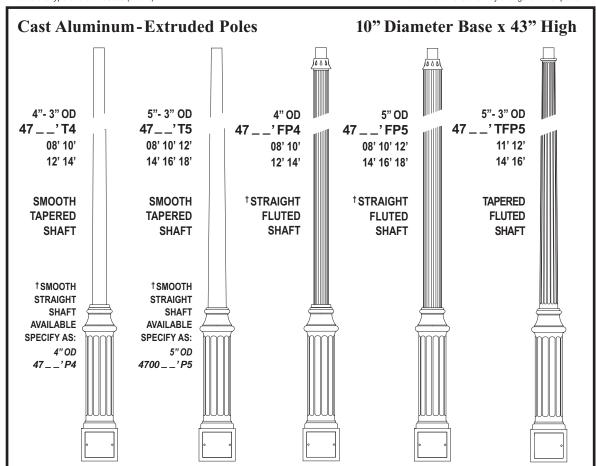

^{*}For candy cane poles insert _____AG ft (feet - above grade height). See diagram on reverse side

4700 AUSTIN SERIES

POSTS / OPTIONS / POST CAPS

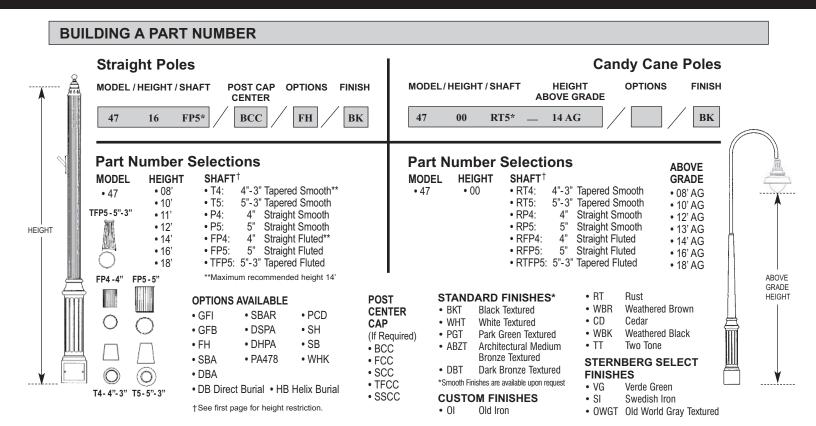

^{*}Add 12 after shaft if optional 12" square base is required.

OPTIONS AVAILABLE See Accessories Section for more options and information GFI - Ground Fault Interrupter SBAR-Single Banner Arm PCD - Photo Control mounts 0 mounts in the pole and Ring on door on pole **GFB** - Ground Fault Breaker SH - Speaker Hub for inside base mounting speaker, **DSPA**- Double Stepped Planter floodlight or signal Arms mount on either side Flag Pole Holder mounts on the pole SB - Sign Bracket mounts **DHPA-** Double Hooked Planter on pole to hold signs Arms mount on either side SBA - Single Banner Arm mounts on the pole **DBA** - Double Banner Arms J, PA478-Decorative Planter Arms WHK - Wreath Hook mounts with planter rings on pole to hold mount on same side decorations of the pole

POST CENTER CAPS (If Required)



BCC-**Ball Center Cap**



FCC-Finial Center Cap



SCC-Spiked Center Cap



TFCC-Tall Finial Center Cap



SSCC-

Side Spiked Center Cap

